

Features:

- free standing, polyethylene grease separator in frost-free rooms
- compact oval design
- acc. to DIN EN 1825 without partition between silt trap and separating chamber
- connections for inlet and outlet suitable for PEHD-pipe
- odour-proof inspection cover 1 x up to NS 2, 2 x for NS 4-10
- circular sight glass, sampling device, filling devices and discharge device optionally available

Application:

- sewage treatment in gastronomic businesses and meat-processing industry

Scope of delivery:

- optional accessories




Product benefits:

- Special versions (space saving design, with pump technology available)

Technical data:

| Art.no. | L [mm] | W [mm] | H [mm] | Weight [kg] |
|---------|-----------|-----------|-----------|----------------|
| 14321 | 1820 | 630 | 1310 | 116 |

Example of installation:

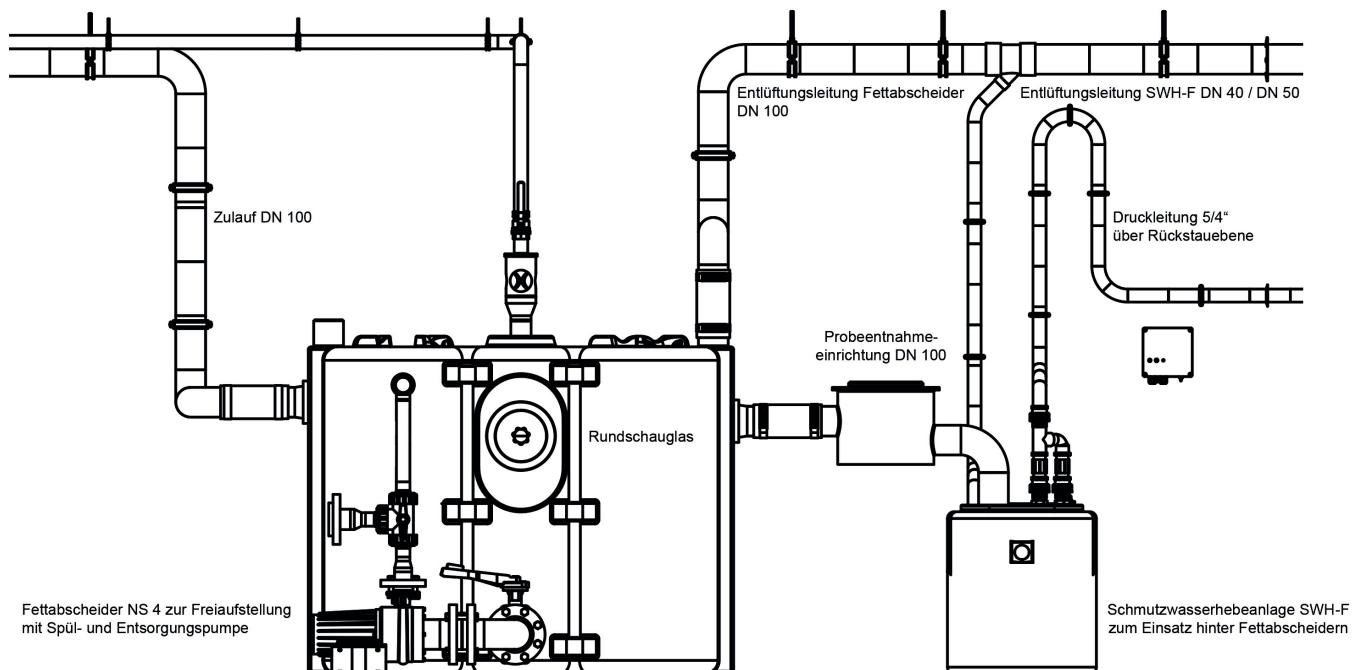

Dimensions:

